


Pismo Capital Preventive Maintenance Project

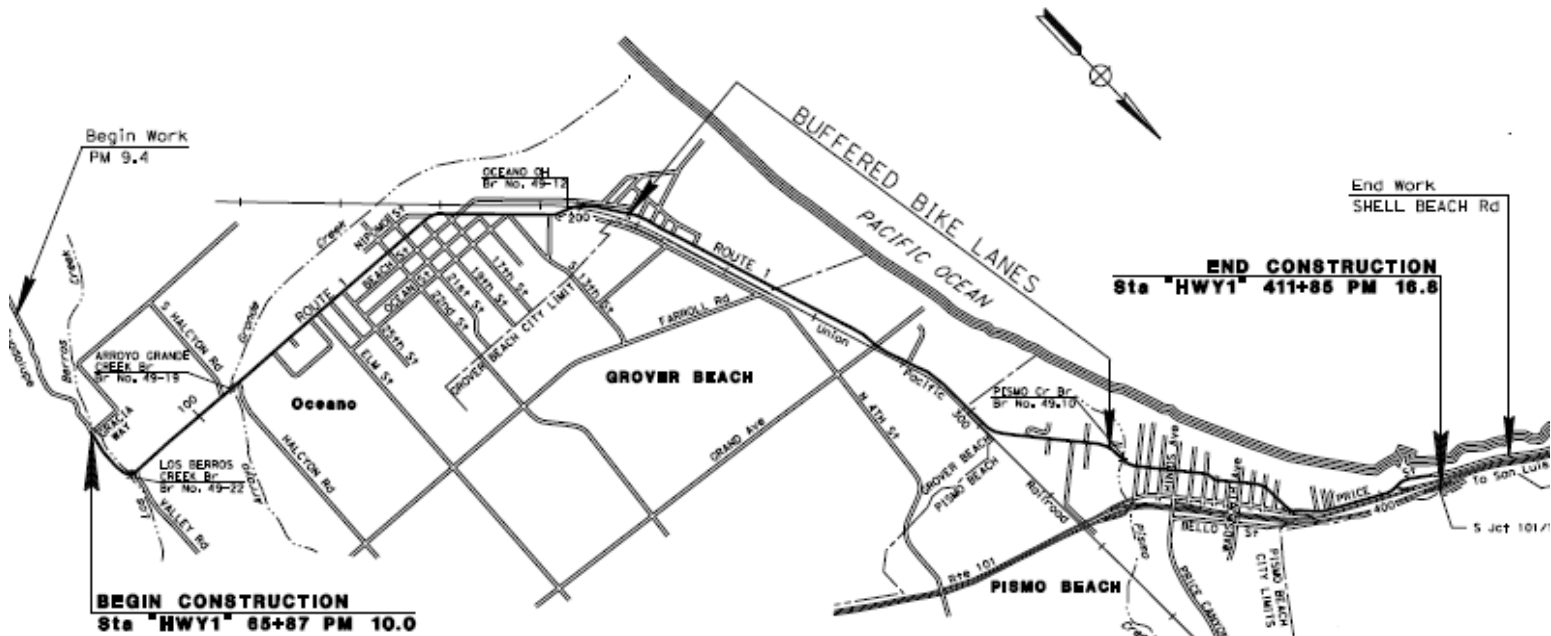

PURPOSE

The purpose of this project is to improve ride quality of the existing pavement in San Luis Obispo County on Route 1 from Garcia Way to the South 1/101 Separation.

MAJOR FEATURES

- The project will overlay the roadway with 0.2" of rubberized hot mix asphalt.
- Locations with curb and gutter or distressed pavement will be cold planed 0.2' prior to paving.
- Severely distressed pavement exhibiting a failed structural section will be removed and replaced.
- 68 curb ramps at intersections will be replaced or modified to comply with accessibility standards.
- Delineation, roadside signs, and guard railing will also be replaced. Electrical upgrades including signal and safety lighting, loop detector replacements, and census loops were also identified to be completed with this project
- Complete streets elements are added to this Capital Preventative Maintenance Project (CAPM) by widening the shoulders and striping in buffered bike lanes (see mapping at top of fact sheet for limits of buffered bike lanes.)

ESTIMATED CONSTRUCTION COST/SCHEDULE

\$13 million – State Highway Operation and Protection Program (SHOPP) funding

Begin Construction: Fall 2022

End Construction: Fall/Winter 2023.

California Department of Transportation
 Monterey – San Benito – San Luis Obispo – Santa Barbara – Santa Cruz
 District 5, Higuera Street, San Luis Obispo, California 93401
 District 5 Public Information Office (805) 549-3318
 www.dot.ca.gov/dist05 email: info-d5@dot.ca.gov
 June 2020

